



ANDY

EXECUTIVE CHAIR

Italian 1IM approval is available in NE and TF fabrics, upon request.

COMPOSITION AND MATERIALS

VERSIONS

Available in the following versions:

- Single color,
- bicolor, color 1 outer shell
- color 2 inner shell



Single color



Bicolor

STRUCTURE, PADDING

- Plywood inner frame , thickness 12mm
- Polyurethane foam backrest padding, density 25 kg/m³, thickness 70 mm
- Polyurethane foam seat padding, density 40 kg/m³, thickness 80 mm


ARMRESTS

Fully upholstered plywood armrests, thickness 12mm




MECHANISM AND SEAT REGULATION

AR – Free tilt mechanism with height adjustment, polished aluminium




Seat height
Pull the lever A upwards without sitting to increase the height of the seat. Press the lever A upwards while sitting to reduce the height of the seat.



Tilting of the chair
A spring system allows the chair to tilt, following the natural body movement

MECHANISM
AND
SEAT REGULATION

N - Knee tilt mechanism with 4 locking positions, black



Seat height
Pull the lever A upwards without sitting to increase the height of the seat. Press the lever A upwards while sitting to reduce the height of the seat.



Tilting of the chair
A spring system allows the chair to tilt, following the natural body movement.



Backrest tension control
Turn lever C clockwise to increase the tilting resistance. Turn knob C counterclockwise to decrease the tilting resistance

BASE

B65 - 5 star polished aluminium base \varnothing 690 mm



CASTORS



R26 - Oversize self breaking castors in PP \varnothing 65 mm



R27 - Hard floor oversize self breaking black castors in PP, \varnothing 65 mm




R28 - Hollowed hard floor oversize self-breaking black castors in PP \varnothing 65 mm



R21 - Oversize hard floor castors, chromed in PP \varnothing 60 mm

OPTIONAL


CC – Cross-stitched finish




DATASHEET

DIMENSIONS,
VOLUMES
AND WEIGHT

cod. AND_P 111 N B65
cod. AND_P 122 AYB65

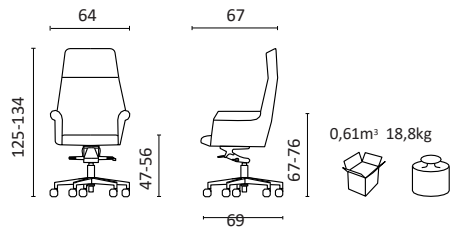


cod. AND_P 111 AR B65
cod. AND_P 122 AWB65

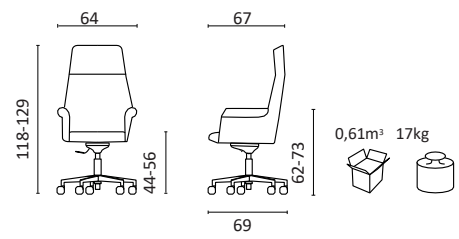

Product codes refer to Milani 2018 pricelist

DATA SHEET

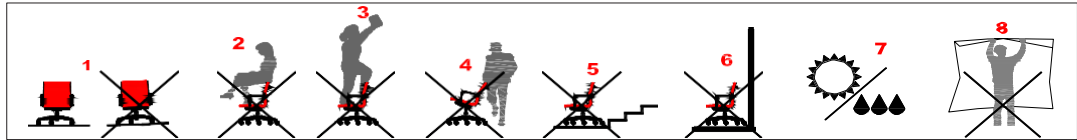

GENERAL INFORMATION

During video terminal use, ensure your feet are firmly on the floor; the angles between calf and thigh, thigh and upper body, forearm and shoulder, shall form a 90° angle. The knee shall be close to the front edge of the seat.

- 1) The seat shall be only used on flat and clean surfaces, avoiding uneven floors (ducts, joints etc..)
- 2) The seat can only be used by one person at a time.
- 3) Never stand with the feet on the chair; never sit on the armrests or on the outer edge of the seat.
- 4) Do not remove knobs or screws and, in the case of broken, missing or worn parts, do not use the chair until they are duly replaced with suitable spare parts supplied by Milani Srl.
- 5) Avoid use near dangerous objects or places (cables, steps, stairs, doors, windows, etc.).
- 6) Avoid use near walls or objects that may be damaged.
- 7) Do not expose the chair to direct sunlight or in excessively humid environment, do not use outdoors: the upholstery may be irreparably damaged.
- 8) Do not use the packaging improperly: it may cause chocking.
The product is intended for its normal use , in offices and similar environments.

Useful information on castors choice:

Nylon self-breaking castors: suitable for normal floors and carpets; equipped with a self-breaking device that ensures higher safety.

Self-breaking rubber castors: suitable for delicate floors (e.g. parquet). Equipped with a soft tread to ensure greater resistance on the floor and a self-breaking device for higher safety.

Product maintenance:

Check periodically (at least every month) that all the screws are firmly fixed.

Periodically lubricate (at least every 6 months) the mechanical parts subject to movement, in particular gas lifts, which can be only replaced by qualified personnel in case of breaking or malfunction .

Periodically clean the castors according to the environmental conditions(at least every 3 months).

Any upholstered part covered with fabric shall be cleaned with a brush or vacuum cleaner, any upholstered part in natural or artificial leather shall be cleaned with a clean, damp and soft cloth; for difficult stains use specific delicate detergents following the specific product instructions ; all other parts (plastic, metal, wood) must be cleaned with a damp cloth. Do not use alcohol-based products, bleach, solvents or abrasive products (it is advisable to try first on a non-visible part).

For any problem ask for the assistance of qualified personnel.

WARRANTY

The warranty includes free replacement of all moving mechanical parts subject to wear: castors, gas lift, mechanisms in general, provided that the defects are not caused by misuse or improper use of the product . Transport and delivery costs will be charged to the customer starting from the second year from sale. The warranty is applicable only providing all information related to the product (specifying model, code and purchase document) Repairs can be made:

- 1) In case the defect is defined, parts will be shipped and replaced .
- 2) In case the defect has to be defined, shipping out the seat to Milani S.r.l. with suitable packing by designated courier. If after checking the product, Milani S.r.l. will reckon that the defect was caused by the customer, will charge all related costs including transport.

DISPOSAL INFO

Here you can find a list of materials used in our production process, in order to adopt a correct approach to recycling and disposal :

Wood: beech or birch plywood, chipboard, hardboard

Metal: iron, steel, die-cast aluminum

Plastics: PVC, polypropylene, polyurethane, nylon

Fabrics: natural leather, artificial leather, fabric, mesh

Our products do not contain harmful or potentially dangerous substances.

CERTIFICATIONS

Milani S.r.l. has obtained the following certifications :

UNI EN ISO 9001 Quality management system according to UNI norms

EN ISO 14001 Environmental management system

OH SAS 18001 Work safety management system